

ENVIRONMENTAL PRODUCT DECLARATION

in accordance with ISO 14025, ISO 21930 and EN 15804

Owner of the declaration:	Flokk Holding AS - Profim
Program operator:	The Norwegian EPD Foundation
Publisher:	The Norwegian EPD Foundation
Declaration number:	NEPD-2988-1666-EN
Registration number:	NEPD-2988-1666-EN
ECO Platform reference number:	-
Issue date:	05.08.2021
Valid to:	05.08.2026

Profim LightUp 250SL

Flokk Holding AS - Profim

www.epd-norge.no



profim

General information

Product:

Profim LightUp 250SL

Program operator:

The Norwegian EPD Foundation
Pb. 5250 Majorstuen, 0303 Oslo
Phone: +47 23 08 80 00
e-mail: post@epd-norge.no

Declaration number:

NEPD-2988-1666-EN

ECO Platform reference number:

This declaration is based on Product Category Rules:

CEN Standard EN 15804:2012+A1:2013 serves as core PCR
NPCR 026:2018 Part B for furniture

Statement of liability:

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

Declared unit:

1 Pcs Profim LightUp 250SL

Declared unit with option:

A1,A2,A3,A4

Functional unit:

One chair: LightUp 250SL

General information on verification of EPD from EPD tools:

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Individual third party verification of each EPD is not required when the EPD tool is i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPDNorway, and iii) the process is reviewed annually. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Verification of EPD tool:

Independent third party verification of the EPD tool, background data and test-EPD in accordance with EPDNorway's procedures and guidelines for verification and approval of EPD tools.

Erik Svanes, Norsus AS

(no signature required)

Owner of the declaration:

Flokk Holding AS - Profim
Contact person: Damian Bakowski
Phone: +48 785 124 085
e-mail: damian.bakowski@flok.com

Manufacturer:

Flokk Holding AS - Profim

Place of production:

Flokk Holding AS - Profim
ul. Górnicza 8 62-700 Turek
Poland

Management system:

ISO 9001:2015, registration number 069780 QM15 ISO 14001:2015, registration number 069780 UM15

Organisation no:

PL6680000366

Issue date:

05.08.2021

Valid to:

05.08.2026

Year of study:

2021

Comparability:

EPDs from programmes other than the Norwegian EPD Foundation may not be comparable

Development and verification of EPD:

The declaration has been developed and verified using EPD tool lca.tools ver EPD2020.11, developed by LCA.no AS. The EPD tool is integrated into the company's environmental management system, and has been approved by EPD-Norway

Developer of EPD:

Damian Bakowski

Reviewer of company-specific input data and EPD:

Arleta Derdziak

Approved:

Sign

Håkon Hauan, CEO EPD-Norge

Key environmental indicators	Unit	Cradle to gate A1 - A3
Global warming	kg CO2 eqv	83,01
Total energy use	MJ	1309,10
Amount of recycled materials	%	17,72

Product

Market:

All

Product description:

<https://www.profim.eu/products/collection/lightup-1>

Product specification

Technical data:

According to product sheet.
<https://www.profim.eu/resources/brochures>

Reference service life, product

5 years

Reference service life, building

Materials	kg	%	Recycled share in material (kg)	Recycled share in material (%)
Metal - Aluminium	0,08	0,49	0,00	0,00
Metal - Steel	6,48	39,40	1,17	18,08
Textile - Polyester (PE)	0,29	1,76	0,19	66,90
Plastic - Polyurethane (PUR)	0,82	4,96	0,00	0,00
Plastic - Acrylonitrile butadiene styrene (ABS)	0,05	0,30	0,00	0,00
Plastic - Polypropylene (PP)	0,95	5,74	0,01	0,53
Plastic - Polyoxymethylene (POM)	0,18	1,09	0,00	0,00
Rubber, synthetic	0,02	0,12	0,00	0,00
Wood - Plywood	1,82	11,06	0,00	0,00
Plastic - Nylon (PA)	0,25	1,52	0,00	0,00
Plastic - Polyamide with glass fibre (PAGF30)	5,52	33,55	0,00	0,03

Packaging	kg		Recycled share in material (kg)	Recycled share in material (%)
Packaging - Cardboard	1,06		0,81	76,30
Packaging - Cardboard	3,44		2,62	76,30
Packaging - Plastic	0,10		0,00	0,00
Packaging - Paper	0,05		0,00	0,00

LCA: Calculation rules

Declared unit:

1 Pcs Profim LightUp 250SL

Cut-off criteria:


All major raw materials and all the essential energy is included. The production processes for raw materials and energy flows with very small amounts (less than 1%) are not included. These cut-off criteria do not apply for hazardous materials and substances.

Data quality:

Specific data for the product composition are provided by the manufacturer. They represent the production of the declared product and were collected for EPD development in the year of study. Background data is based on registered EPDs according to EN 15804, Ostfold Research databases, ecoinvent and other LCA databases. The data quality of the raw materials in A1 is presented in the table below.

Materials	Source	Data quality	Year
Plastic - Polyoxymethylene (POM)	ecoinvent 3.4	Database	2015
Plastic - Polypropylene (PP)	ecoinvent 3.4	Database	2015
Plastic - Polyurethane (PUR)	ecoinvent 3.4	Database	2015
Rubber, synthetic	ecoinvent 3.4	Database	2015
Plastic - Acrylonitrile butadiene styrene (ABS)	PlasticsEurope	EPD	2015
Metal - Steel	ecoinvent 3.3	Database	2016
Metal - Aluminium	ecoinvent 3.4	Database	2017
Metal - Steel	ecoinvent 3.4	Database	2017
Metal coating - Powder coating on steel	ecoinvent 3.4	Database	2017
Packaging - Cardboard	ecoinvent 3.4	Database	2017
Packaging - Paper	ecoinvent 3.4	Database	2017
Packaging - Plastic	ecoinvent 3.4	Database	2017
Plastic - Polyamide with glass fibre (PAGF30)	ecoinvent 3.4	Database	2017
Textile - Polyester (PE)	ecoinvent 3.4	Database	2017
Wood - Plywood	ecoinvent 3.4	Database	2017
Plastic - Polyamide with glass fibre (PAGF30)	NORSUS and Ecoinvent 3.6	Database	2018
Plastic - Nylon (PA)	ecoinvent 3.6	Database	2019
Process	ecoinvent 3.6	Database	2019
Textile - Polyester (PE)	ecoinvent 3.6	Database	2019

System boundary:

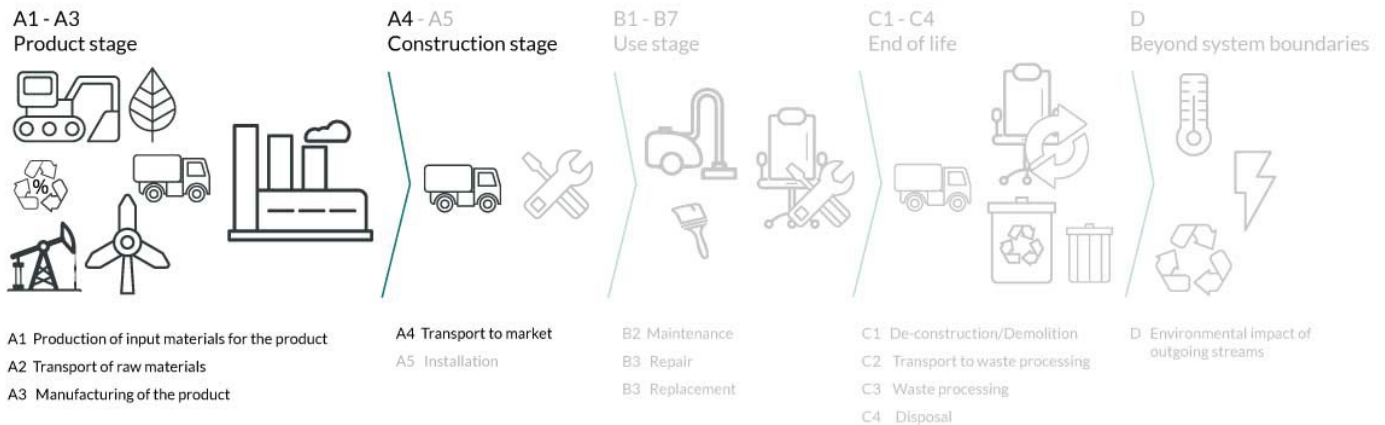

Additional technical information:

Product description:

230S/230SL/230SFL/230ST/230STL - upholstered backrest

250S/250SL/250SFL/250ST/250STL - mesh backrest

Mechanism:

Synchro S - adjustment of seat height, synchronising mechanism with the possibility to adjust the resilience of the backrest to the weight of the sitting person. The synchro mechanism can be locked in one of five positions.

Synchro SL - S mechanism with function of sliding seat. The synchro mechanism can be locked in one of five positions.

Synchro SFL - SL mechanism with function of additional seat / backrest tilt. The synchro mechanism can be locked in one of four positions.

Synchro ST - adjustment of seat height, synchronising mechanism with automatic adjustment the resilience of the backrest to the weight of the sitting person. The self-weighting synchro mechanism can be locked in the upright position.

Synchro STL - ST mechanism with function of sliding seat. The self-weighting synchro mechanism can be locked in the upright position.

Base:

Five-star base.

Variants:

- chrome (polished aluminum)
- black (plastic polyamide)
- light grey (plastic RAL 7047) - concerns SL, SFL mechanism and P61 PU armrest

*While ordering LightUp 230SL/230SFL/250SL/250SFL with light grey base all plastic elements (seat cover, backrest frame, lumbar support, armrests, hanger) will be light grey as well.

Armrest:

P61PU - Height adjustable armrest (range 80 mm), polyurethane pad.

P59PU - Height adjustable armrest (range 80 mm), sliding pad (+/- 50 mm) with span option (+/- 30 mm). Colour of armrest frame: black.

Castors/glides:

- hard castors (for soft floors)
- soft castors (for hard floors)
- teflon glides (universal)

Colours of castors:

- black (plastic)
- light grey (plastic RAL 7047)

seat

Black or light grey plastic cover; deciduous plywood; cold molded foam - density 70 kg/m3.

backrest

Types of backrest :

- upholstered
- mesh

Option - lumbar support:

- Type A - height adjustable
- Type B - height and depth adjustable

Hanger, maximum load 4 kg.

Net weight:

230S / 230SL / 230SFL – 17,0 kg

230ST / 230STL – 16,5 kg

250S / 250SL / 250SFL - 16,0 kg

250ST / 250STL - 15,5 kg

Gross weight:

230S / 230SL / 230SFL – 21,0 kg

230ST / 230STL – 20,5 kg

250S / 250SL / 250SFL - 20,0 kg

250ST / 250STL - 19,5 kg

The following information describe the scenarios in the different modules of the EPD.

The following information describe the scenarios in the different modules of the EPD.

Transport from production place to user (A4)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck	38,8 %	Truck, 16-32 tonnes, EURO 5	200	0,044606	l/tkm	8,92
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

Assembly (A5)

.	Unit	Value
Auxiliary	kg	
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
Output materials for waste treatment	kg	
Dust in the air	kg	
VOC emissions	kg	

Use (B1)

.	Unit	Value

Maintenance (B2)/Repair (B3)

.	Unit	Value
Maintenance cycle*		
Auxiliary		
Other resources		
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Material loss	kg	
VOC emissions	kg	

Replacement (B4)/Refurbishment (B5)

.	Unit	Value
Replacement cycle*		
Electricity consumption	kWh	
Replacement of worn parts		

* Described above if relevant

Operational energy (B6) and water consumption (B7)

.	Unit	Value
Water consumption	m ³	
Electricity consumption	kWh	
Other energy carriers	MJ	
Power output of equipment	kW	

End of Life (C1, C2)

.	Unit	Value
Hazardous waste disposed	kg	
Collected as mixed construction waste	kg	
Reuse	kg	
Recycling		
Energy recovery		
To landfill	kg	

Transport to waste processing (C2)

Type	Capacity utilisation (incl. return) %	Type of vehicle	Distance km	Fuel/Energy consumption	Unit	Value (l/t)
Truck					l/tkm	
Railway					l/tkm	
Boat					l/tkm	
Other Transportation					l/tkm	

LCA: Results

The LCA results are presented below for the declared unit defined on page 2 of the EPD document.

System boundaries (X=included, MND=module not declared, MNR=module not relevant)

Product stage				Construction installation stage	User stage							End of life stage				Beyond the system boundaries
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X													

Environmental impact

Parameter	Unit	A1	A2	A3	A4
GWP	kg CO ₂ -eq	7,77E+01	2,33E+00	2,98E+00	6,90E-01
ODP	kg CFC11 -eq	3,88E-06	4,28E-07	4,57E-08	1,27E-07
POCP	kg C ₂ H ₄ -eq	2,33E-02	9,64E-04	6,83E-04	1,12E-04
AP	kg SO ₂ -eq	3,16E-01	2,76E-02	1,80E-02	2,20E-03
EP	kg PO ₄ ³⁻ -eq	5,77E-02	2,71E-03	2,03E-03	3,65E-04
ADPM	kg Sb -eq	2,92E-04	3,36E-06	1,19E-07	2,10E-06
ADPE	MJ	8,37E+02	3,40E+01	3,02E+01	1,04E+01

GWP Global warming potential; ODP Depletion potential of the stratospheric ozone layer; POCP Formation potential of tropospheric photochemical oxidants; AP Acidification potential of land and water; EP Eutrophication potential; ADPM Abiotic depletion potential for non fossil resources; ADPE Abiotic depletion potential for fossil resources

Reading example: 9,0 E-03 = 9,0*10⁻³ = 0,009

*INA Indicator Not Assessed

Resource use

Parameter	Unit	A1	A2	A3	A4
RPEE	MJ	2,05E+02	6,86E-01	3,24E+00	1,51E-01
RPEM	MJ	8,51E+01	0,00E+00	0,00E+00	0,00E+00
TPE	MJ	2,90E+02	6,86E-01	3,24E+00	1,51E-01
NRPE	MJ	1,03E+03	3,52E+01	3,14E+01	1,06E+01
NRPM	MJ	1,68E+02	0,00E+00	0,00E+00	0,00E+00
TRPE	MJ	1,20E+03	3,52E+01	3,14E+01	1,06E+01
SM	kg	4,81E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00
W	m ³	7,43E-01	6,36E-03	2,14E-02	1,99E-03

RPEE Renewable primary energy resources used as energy carrier; RPEM Renewable primary energy resources used as raw materials; TPE Total use of renewable primary energy resources; NRPE Non renewable primary energy resources used as energy carrier; NRPM Non renewable primary energy resources used as materials; TRPE Total use of non renewable primary energy resources; SM Use of secondary materials; RSF Use of renewable secondary fuels; NRSF Use of non renewable secondary fuels; W Use of net fresh water

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

End of life - Waste

Parameter	Unit	A1	A2	A3	A4
HW	kg	7,24E-03	2,01E-05	7,14E-06	6,21E-06
NHW	kg	3,28E+01	1,65E+00	1,16E+00	5,60E-01
RW	kg	INA*	INA*	INA*	INA*

HW Hazardous waste disposed; NHW Non hazardous waste disposed; RW Radioactive waste disposed

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

End of life - Output flow

Parameter	Unit	A1	A2	A3	A4
CR	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MR	kg	0,00E+00	0,00E+00	7,05E-01	0,00E+00
MER	kg	6,58E-02	0,00E+00	3,38E-03	0,00E+00
EEE	MJ	INA*	INA*	INA*	INA*
ETE	MJ	INA*	INA*	INA*	INA*

CR Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy

Reading example: 9,0 E-03 = $9,0 \cdot 10^{-3} = 0,009$

*INA Indicator Not Assessed

Additional Norwegian requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

National production mix from import, low voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3).

Dangerous substances

The product contains no substances given by the REACH Candidate list or the Norwegian priority list.

Indoor environment

Additional environmental information

Bibliography

ISO 14025:2010 Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

ISO 14044:2006 Environmental management - Life cycle assessment - Requirements and guidelines.

EN 15804:2012+A1:2013 Environmental product declaration - Core rules for the product category of construction products.

ISO 21930:2017 Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products.

ecoinvent v3, Allocation, cut-off by classification, Swiss Centre of Life Cycle Inventories.

Iversen et al., (2018) eEPD v3.0 - Background information for EPD generator system. LCA.no report number 04.18

Vold et al., (2019) EPD generator for Norsk Industri, Background information for industry application and LCA data, LCA.no report number 06.19.

NPCR Part A: Construction products and services. Ver. 1.0. April 2017, EPD-Norge.

NPCR 026 Part B for Furniture. Ver. 2.0 October 2018, EPD-Norge.

	epd-norge.no The Norwegian EPD Foundation	Program operator and publisher The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo, Norway	Phone: +47 23 08 80 00 e-mail: post@epd-norge.no web: www.epd-norge.no
	Owner of the declaration Flokk Holding AS - Profim ul. Górnicza 8 62-700 Turek	Phone: +48 785 124 085 e-mail: damian.bakowski@flokk.com web: https://www.profim.pl	
	Author of the Life Cycle Assessment LCA.no AS Dokka 1C 1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no	
	Developer of EPD generator LCA.no AS Dokka 1C 1671 Kråkerøy	Phone: +47 916 50 916 e-mail: post@lca.no web: www.lca.no	